

CADDY® ROD LOCK Strut

M12, A25 & C15 Metric Struts, 550 mm - 1050 mm Span

Part Number	Article Number	Rod Size	Strut Type	Strut Thickness mm	Span L Between Two Rods mm	Overall Strut Length L1 mm	F* [N]
CRLP1M12L550	390047	M12	C - type	1.5	550	600	1795
CRLP1M12L750	390048				750	800	967
CRLP2M12L550	390049				550	600	7484
CRLP2M12L750	390050		A - type	2.5	750	800	5488
CRLP2M12L950	390051				950	1000	4333
CRLP2M12L1050	390052				1050	1100	3920

*Capacity ratings for strut (F) assumes a uniformly distributed load and includes a hole factor of 0.92. The load applied to CADDY ROD LOCK Strut should include a factor of safety appropriate for the application in which the strut is being used. For indoor applications only.

Note: Product must be installed with the open side of the channel facing up. See Figure 1.







FIGURE 1

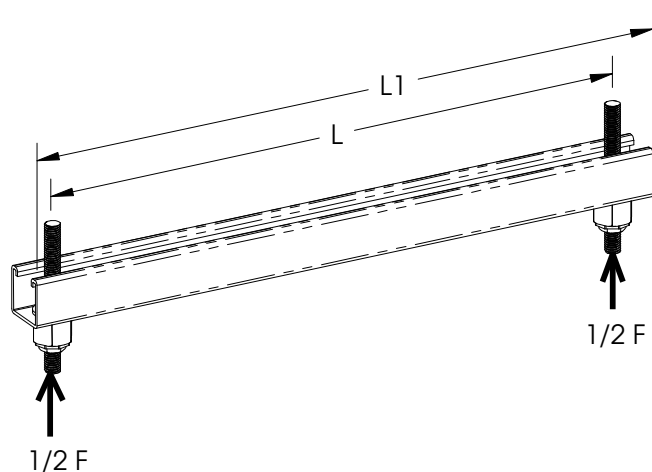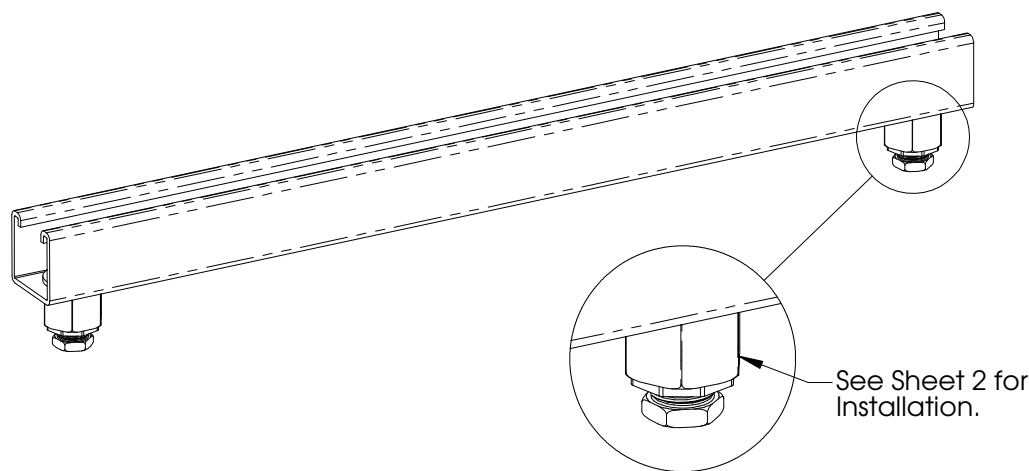

WARNING:

1. ERICO products shall be installed and used only as indicated in ERICO product instruction sheets and training materials. Instruction sheets are available at www.erico.com and from your ERICO customer service representative.
2. ERICO products must never be used for a purpose other than the purpose for which they were designed or in a manner that exceeds specified load ratings.
3. All instructions must be completely followed to ensure proper and safe installation and performance.
4. Improper installation, misuse, misapplication or other failure to completely follow ERICO's instructions and warnings may cause product malfunction, property damage, serious bodily injury and death.
5. Products that are manufactured using spring steel components shall be used only in a non-corrosive indoor environment.
6. All pipe supports, hangers, intermediate components and structural attachments must ONLY be used as described herein and are NEVER to be used for any other purpose.

NOTE: All load ratings are for static conditions and do not account for dynamic loading such as wind, water or seismic loads, unless otherwise noted.

The customer is responsible for:

- a. Conformance to all governing codes.
- b. The integrity of structures to which the products are attached, including their capability of safely accepting the loads imposed, as evaluated by a qualified engineer.
- c. Using appropriate industry standard hardware as noted above.

SAFETY INSTRUCTIONS:

All governing codes and regulations and those required by the job site must be observed. Always use appropriate safety equipment such as eye protection, hard hat, and gloves as appropriate to the application.

CADDY, CADWELD, CRITEC, ERICO, ERIFLEX, ERITECH, and LENTON are registered trademarks of ERICO International Corporation.



TECHNICAL SUPPORT:
www.erico.com

CF5512_A





1 OF 2

© 2014 ERICO International Corporation.



CADDY® ROD LOCK Strut

M12, A25 & C15 Metric Struts, 550 mm - 1050 mm Span

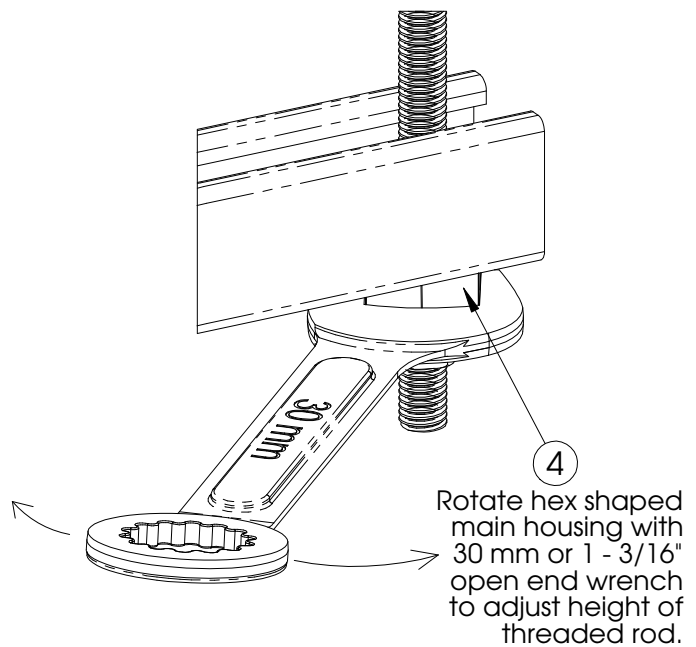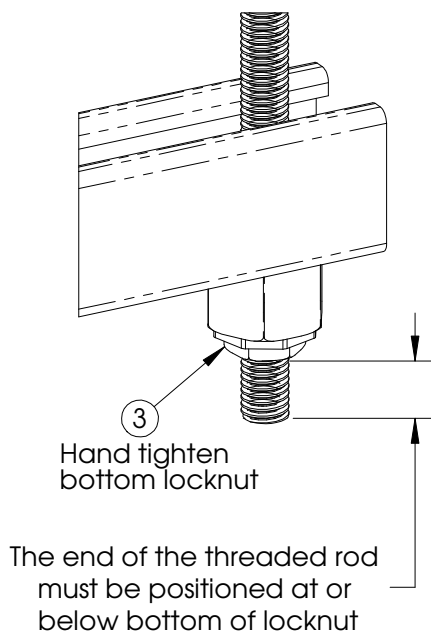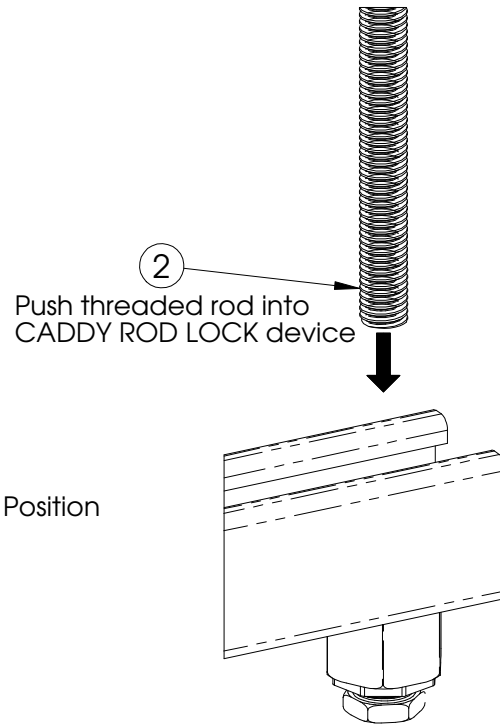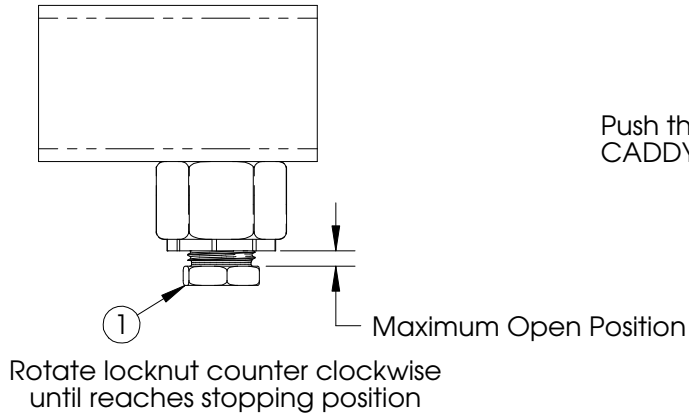

CADDY, CADWELD, CRITEC, ERICO, ERIFLEX, ERITECH, and LENTON are registered trademarks of ERICO International Corporation.

TECHNICAL SUPPORT:
www.erico.com

CF5512_A

2 OF 2

© 2014 ERICO International Corporation.

ERICO®