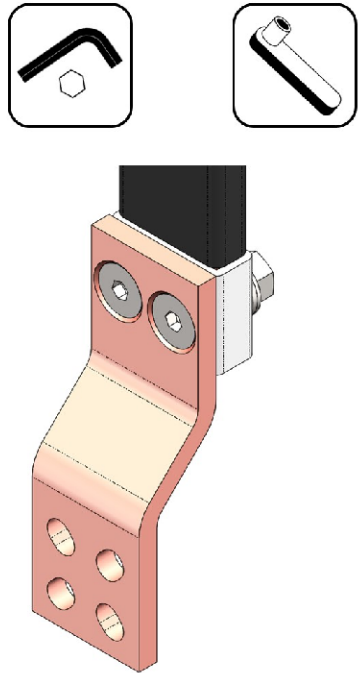
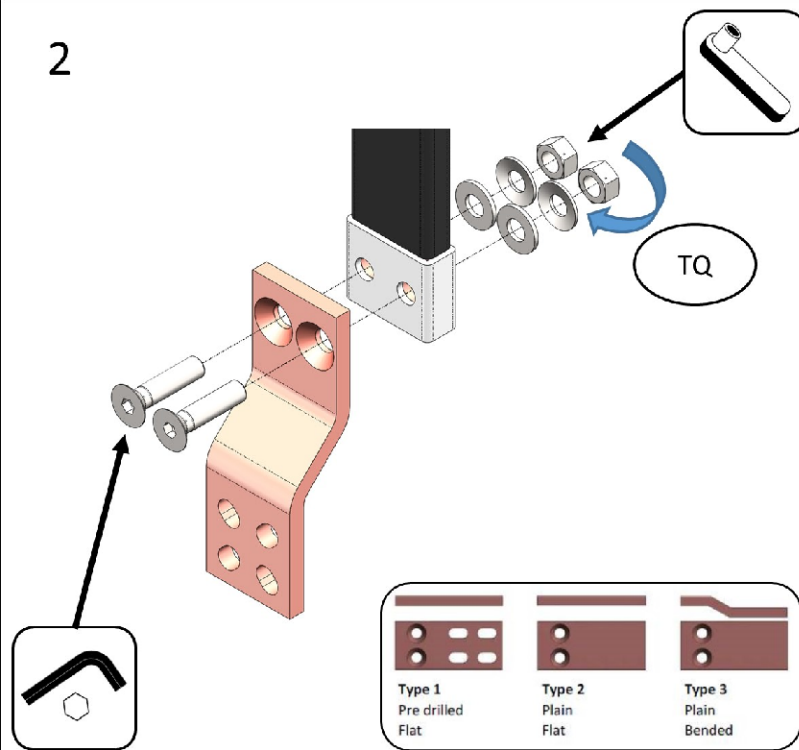


nVENT ERIFLEX FLEXBUS ADVANCED EXTENDER TERMINAL EXTENDER FOR BUSBAR CONNECTIONS



1



2



3

Part Number	Global Part Number	Description	Bolt Size	Qty			TQ
508110	FLEXEXT55A1	FleXbus Extender 50x10 for conductor 220, 360, and 545 mm ² Type 1	M10	2	6mm	17mm	60Nm
508111	FLEXEXT55A2	FleXbus Extender 50x10 for conductor 220, 360, and 545 mm ² Type 2					
508112	FLEXEXT55A3	FleXbus Extender 50x10 for conductor 220, 360, and 545 mm ² Type 3					
508113	FLEXEXT55B1	FleXbus Extender 50x10 for conductor 640 mm ² Type 1	M10	4	6mm	17mm	60Nm
508114	FLEXEXT55B2	FleXbus Extender 50x10 for conductor 640 mm ² Type 2					
508115	FLEXEXT55B3	FleXbus Extender 50x10 for conductor 640 mm ² Type 3					
508116	FLEXEXT1001	FleXbus Extender 100x10 for conductor 960, 1280, and 1810 mm ² Type 1	M12	4	8mm	19mm	110Nm
508117	FLEXEXT1002	FleXbus Extender 100x10 for conductor 960, 1280, and 1810 mm ² Type 2					
508118	FLEXEXT1003	FleXbus Extender 100x10 for conductor 960, 1280, and 1810 mm ² Type 3					

WARNING:

1. nVent products shall be installed and used only as indicated in nVent product instruction sheets and training materials. Instruction sheets are available at www.nVent.com and from your nVent customer service representative.
2. nVent products must never be used for a purpose other than the purpose for which they were designed or in a manner that exceeds specified load ratings.
3. All instructions must be completely followed to ensure proper and safe installation and performance.
4. Improper installation, misuse, misapplication or other failure to completely follow nVent's instructions and warnings may cause product malfunction, property damage, serious bodily injury and/or death, and void your warranty.

SAFETY INSTRUCTIONS:

All governing codes and regulations and those required by the job site must be observed.
Always use appropriate safety equipment such as eye protection, hard hat, and gloves as appropriate to the application.

nVent, nVent CADDY, nVent ERICO Cadweld, nVent ERICO Critec, nVent ERICO, nVent ERIFLEX, and nVent LENTON are owned by nVent or its global affiliates. All other trademarks are the property of their respective owners. nVent reserves the right to change specifications without prior notice.




TECHNICAL SUPPORT
www.nVent.com

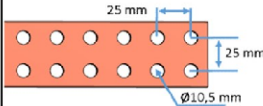



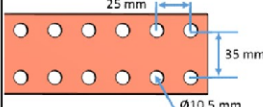



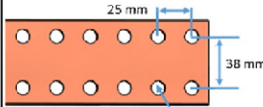



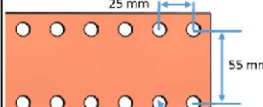





IP8609_A

1 OF 2

© 2021 nVent All Rights Reserved

Extender: Type 1 Mounting on Punched Busbars

Extender Type 1 (Pre drilled & flat) - Mounting on punched busbars			
Part Number	508110	508113	508116
Description	Flexbus Extender 50x10 for conductor 220, 360 and 545mm ² Type 1	Flexbus Extender 50x10 for conductor 640mm ² Type 1	Flexbus Extender 100x10 for conductor 960, 1280 and 1810mm ² Type 1
Extender type 1 Overview			

DPCB Punched Plain Copper Busbar, Double					
Cross Section 50x10 or 50x5					6 bolts min
Cross Section 60x10					6 bolts min
Cross Section 63x5					6 bolts min
Cross Section 80x5 or 80x10					6 bolts min
100x5 or 100x10					6 bolts min

nVent, nVent CADDY, nVent ERICO Cadweld, nVent ERICO Critec, nVent ERICO, nVent ERIFLEX, and nVent LENTON are owned by nVent or its global affiliates. All other trademarks are the property of their respective owners. nVent reserves the right to change specifications without prior notice.