


Features

- Ideal for both new and existing applications
- Can be installed without disassembly of the hanging system and/or removing the clamp
- Compatible with all standard CADDY beam clamps and can be secured to either the set screw or threaded rod
- Large teardrop-shaped opening is compatible with multiple threaded rod diameters, reducing inventory by 50%
- Coined edge on teardrop-shaped opening locks into rod, eliminating shifting during install
- Provides a secure attachment in seismic zones and complies with NFPA® requirements
- Meets the UL® load test for retainer straps



Material: Steel
Finish: Pregalvanized

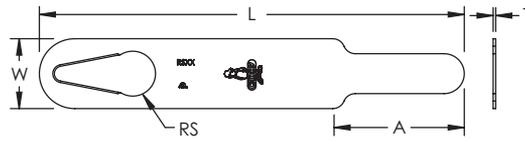

Part Number	Length L	Width W	Thickness T	Rod Size RS	Hole Size HS	A
RS06	6 1/2"	1 3/4"	16 GA	3/8", 1/2"	1 1/8"	3 1/4"
RS08	8 1/2"	1 3/4"	16 GA	3/8", 1/2"	1 1/8"	3 1/4"
RS10	10 1/2"	1 3/4"	16 GA	3/8", 1/2"	1 1/8"	3 1/4"
RS12	12 1/2"	1 3/4"	16 GA	3/8", 1/2"	1 1/8"	3 1/4"
RS14	14 1/2"	1 3/4"	16 GA	3/8", 1/2"	1 1/8"	3 1/4"
RS16	16 1/2"	1 3/4"	16 GA	3/8", 1/2"	1 1/8"	3 1/4"
RS18	18 1/2"	1 3/4"	16 GA	3/8", 1/2"	1 1/8"	3 1/4"

Add 2" to width of flange to determine minimum length strap required.



NFPA is a registered trademark of National Fire Protection Association, Inc. UL, UR, cUL, cUR, cULus and cURus are registered certification marks of UL LLC.

WARNING:

Pentair products shall be installed and used only as indicated in Pentair's product instruction sheets and training materials. Instruction sheets are available at www.erico.pentair.com and from your Pentair customer service representative. Improper installation, misuse, misapplication or other failure to completely follow Pentair's instructions and warnings may cause product malfunction, property damage, serious bodily injury and death and/or void your warranty.

© 2018 Pentair.

Pentair, CADDY, CADWELD, CRITEC, ERICO, ERIFLEX, ERITECH, and LENTON are owned by Pentair or its global affiliates. All other trademarks are the property of their respective owners. Pentair reserves the right to change specifications without prior notice.