
### Perfect Trim Mud Ring Adjustable Mud Ring

PART NUMBER	WALL THICKNESS RANGE	ELECTRICAL BOX SIZE	NO. OF GANGS	DESCRIPTION
PTSG4	5/8" - 1-1/4"	4" SQUARE	1	ADJUSTABLE MUD RING, SINGLE GANG, 4" SQUARE BOX, 5/8" - 1-1/4" WALL
PTSG411	5/8" - 1-1/4"	4-11/16"	1	ADJUSTABLE MUD RING, SINGLE GANG, 4-11/16" BOX, 5/8" - 1-1/4" WALL
PTDG4	5/8" - 1-1/4"	4" SQUARE	2	ADJUSTABLE MUD RING, DOUBLE GANG, 4" SQUARE BOX, 5/8" - 1-1/4" WALL
PTDG411	5/8" - 1-1/4"	4-11/16"	2	ADJUSTABLE MUD RING, DOUBLE GANG, 4-11/16" BOX, 5/8" - 1-1/4" WALL
PTSGEX	1-1/2" - 2 1/4"	ALL	1	EXTENSION RING, SINGLE GANG, 1 1/2" - 2 1/4" WALL THICKNESS
PTDGEX	1-1/2" - 2 1/4"	ALL	2	EXTENSION RING, DOUBLE GANG, 1 1/2" - 2 1/4" WALL THICKNESS
PTC	ALL	ALL	ALL	WALL RETAINER CLIPS FOR PERFECT TRIM ADJUSTABLE MUD RING
PTP1	ALL	ALL	1	PROTECTIVE COVER FOR PERFECT TRIM MUD RING, SINGLE GANG
PTP2	ALL	ALL	2	PROTECTIVE COVER FOR PERFECT TRIM MUD RING, DOUBLE GANG

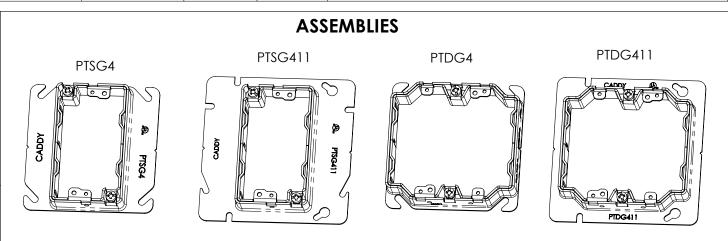

## **ACCESSORIES** PTC PTP1 PTP2 **PTSGEX PTDGEX**

- RNING:

  Nent products shall be installed and used only as indicated in nVent product instruction sheets and training materials. Instruction sheets are available at <a href="https://www.nVent.com">www.nVent.com</a> and from your nVent customer service representative.

  NVent products must never be used for a purpose other than the purpose for which they were designed or in a manner that exceeds specified load ratings.

  All instructions must be <a href="https://completely">completely</a> followed to ensure proper and safe installation and performance.

  Improper installation, misuse, misapplication or other failure to completely follow nVent's instructions and warnings may cause product malfunction, properly damage, serious bodily injury and/or death, and void your warranty.

  Products that are manufactured using spring steel components shall be used only in a non-corrosive indoor environment.

  All pipe supports, hangers, intermediate components and structural attachments must ONLY be used as described herein and are NEVER to be used for any other purpose.

NOTE: All load ratings are for static conditions and do not account for dynamic loading such as wind, water or seismic loads, unless otherwise noted.

The customer is responsible for:

- a. Conformance to all governing codes.
  b. The integrity of structures to which the products are attached, including their capability of safely accepting the loads imposed, as evaluated by a qualified engineer.

  c. Using appropriate industry standard hardware as noted above.


SAFETY INSTRUCTIONS:
All governing codes and regulations and those required by the job site must be observed.
Always use appropriate safety equipment such as eye protection, hard hat, and gloves as appropriate to the application.






1 OF 2

### **Conventional Installation**

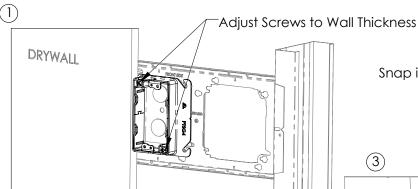

Lock Inner Ring to Wall with Optional Clips (PTC). See CFS628.




Optional Extension Ring (PTSGEX)

Increases Wall Thickness to 2.25". (See CFS629)

Dont Overtighten Adjustment Screws and Damage Drywall. Adjust Tabs to Touch Wall Then Turn 1 Additional Turn (About 5 in-lbs).

# (3)




Snap into Slots


#### 2-Piece Installation

(1)


Install Outer Ring with Protective Cover

(4)




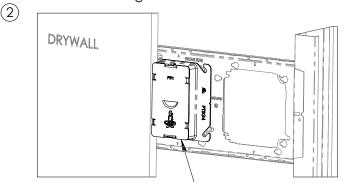

Optional Protective Cover (PTP1) To Protect Wiring Durring Wall Installation. (See CFS627)

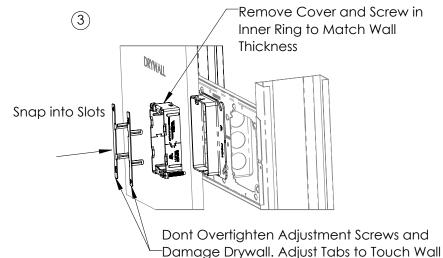

Optional Extension Ring (PTSGEX) Increases Wall Thickness to 2.25" (See CFS629)







Then Turn 1 Additional Turn (about 5 in-lbs).